

SUNNY BOY STORAGE

Approved Batteries and Information on Battery
Communication Connection

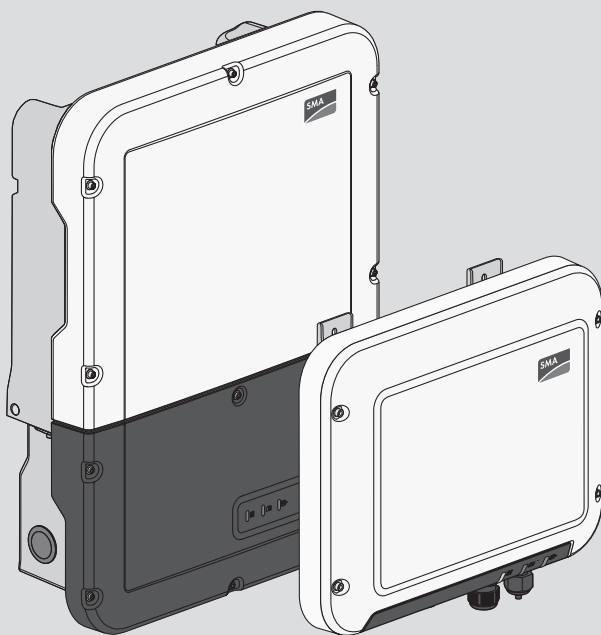


Table of Contents

1 **Approved Batteries 3**

 1.1 SBS2.5-1VL-10 / SBS3.7-10 / SBS5.0-10 / SBS6.0-10 3

 1.2 SBS3.8-US-10 / SBS5.0-US-10 / SBS6.0-US-10..... 6

2 **Battery Communication Connection 8**

 2.1 Cable Requirements..... 8

 2.1.1 SBS2.5-1VL-10..... 8

 2.1.2 SBS3.7-10 / SBS5.0-10 / SBS6.0-10 9

 2.1.3 SBS3.8-US-10 / SBS5.0-US-10 / SBS6.0-US-10 9

 2.2 Cabling Plan..... 10

 2.2.1 SBS2.5-1VL-10..... 10

 2.2.2 SBS3.7-10 / SBS5.0-10 / SBS6.0-10 / SBS3.8-US-10 / SBS5.0-US-10 / SBS6.0-US-10 12

 2.3 Information about the electrical connection 16

1 Approved Batteries

1.1 SBS2.5-1VL-10 / SBS3.7-10 / SBS5.0-10 / SBS6.0-10

In the tables you will find the batteries which are approved for operation with the following battery inverters of SMA Solar Technology AG (status: 2020/08):

- SBS2.5-1VL-10 (Sunny Boy Storage 2.5)
- SBS3.7-10 (Sunny Boy Storage 3.7)
- SBS5.0-10 (Sunny Boy Storage 5.0)
- SBS6.0-10 (Sunny Boy Storage 6.0)

Type (Manufacturer)	Required battery firmware version for:		Required inverter firmware version for:	
	SBS2.5-1VL-10	SBS3.7-10, SBS5.0-10, SBS6.0-10	SBS2.5-1VL-10	SBS3.7-10, SBS5.0-10, SBS6.0-10
RESU7H / EH111063P3S3 Type C (LG Chem)	≥ 15.02.4.R	≥ 16.02.6 R	≥ 2.04.23.R	≥ 1.00.20.R
RESU10H / 15563P3SDLT Type C (LG Chem)	≥ 13.13.0.R	≥ 16.13.6 R	≥ 2.04.14.R	≥ 1.00.20.R
RESU10M (LG Chem)	Not released	≥ 1.01.1 R	Not released	≥ 3.11.03.R
Battery-Box H (BYD Company Lim- ited)	3.00.04.R to 3.00.11.R	3.00.04.R to 3.00.11.R	≥ 2.04.23.R	≥ 1.00.20.R
Battery-Box Premium HVM (BYD Company Lim- ited)	Not released	BMU 3.12 BMS.B-3.18	Not released	≥ 3.11.03.R
Hyperion 3-6 (BMZ GmbH)	Not released	≥ 0.03.07.R	Not released	≥ 3.11.10.R

Type (Manufacturer)	Required battery firmware version for:		Required inverter firmware version for:	
	SBS2.5-1VL-10	SBS3.7-10, SBS5.0-10, SBS6.0-10	SBS2.5-1VL-10	SBS3.7-10, SBS5.0-10, SBS6.0-10
era:powerbase 7.5-15 (IBC SOLAR AG)	Not released	≥ 0.03.07.R	Not released	≥ 3.11.10.R
AXIstorage Li SH 7.5-15 (AXITEC)	Not released	≥ 0.03.07.R	Not released	≥ 3.11.10.R

The firmware version of the battery can be accessed via the user interface of the inverter. The firmware version of the BYD batteries can also be accessed via the user interface of the battery (see manufacturer's manual). With the exception of the BYD Battery-Box (H and Premium HVM), the battery firmware is automatically updated via the inverter. The firmware version of the inverter can also be accessed via the user interface of the inverter.

When using the BYD Battery-Box Premium HVM with the Sunny Boy Storage 3.7/ 5.0/ 6.0, note the "Information on Commissioning" in the download area of our homepage under <http://www.SMA-Solar.com>.

Synchronizing the battery and battery inverter

All batteries mentioned supply a defined nominal current. Please pay attention to the battery manufacturer's recommendation regarding the suitable dimensioning of the battery in order to achieve the nominal and overload currents of the systems stated in the datasheet with a Sunny Boy Storage. Only if the dimensioning of the battery size is synchronized (battery capacity, battery currents, number of battery modules if necessary), the full functionality and power incl. overload can be guaranteed for the PV storage system with the respective battery inverter in use.

Recommendations for the use in various systems for SBS2.5-1VL-10:

Type	Use in systems for increased self- consumption	Use in systems with secure power sup- ply operation	Use in battery- backup systems
RESU7H type C	✓	✗	✗
RESU10H type C	✓	✗	✗
Battery-Box H 5.1	✓	✗	✗
Battery-Box H 6.4	✓	✗	✗
Battery-Box H 7.7	✓	✗	✗
Battery-Box H 9.0	✓	✗	✗
Battery-Box H 10.2	✓	✗	✗

✓ = Yes, ✗ = No

Recommendations for the use in various systems for SBS3.7-10 / SBS5.0-10 / SBS6.0-10:

Battery type (module configura- tion)	increased self- consumption	Use in systems for/with			
		secure power supply operation	battery- backup oper- ation	with multi-battery operation with batteries of the <u>same</u> type	of other types*
RESU7H Type C	✓	✓	✓**	✓	RESU10H Battery-Box H
RESU10H Type C	✓	✓	✓**	✓	RESU7H Battery-Box H
RESU10M	✓	✓	✓	✓	✗
Battery-Box H (5.1 - 10.2)	✓	✓	✓	✓	RESU7H and 10H
Battery-Box Premium HVM (8.3-22.1)	✓	✓	✓	✗ in planning	✗ (in planning with HVS and Battery-Box H)
Hyperion (3-6)	✓	✓	✓	✗ in planning	✗
era:powerbase (7.5-15)	✓	✓	✓	✗ in planning	✗
AXIstorage Li SH (7.5-15)	✓	✓	✓	✗ in planning	✗

* Note that the displayed state of charge may jump when using multi-battery operation with batteries of different capacities. It is therefore recommended to select batteries of similar capacity.

** Depending on the state of charge in terms of battery and PV generation, it can happen that the battery-backup grid is interrupted for a few seconds in battery-backup operation mode during load changes and then restarts again. With an additional parameter setting, it will be possible in future to limit the output power of the PV inverter dynamically or to limit to 0 W or to deactivate the PV inverter. This parameter setting is expected to be available after a firmware update in Q2/2019.

✓ = Yes, ✗ = No

Recommendations for use for SBS3.7-10 / SBS5.0-10 / SBS6.0-10:

Type	Module configuration	SBS 3.7	SBS 5.0	SBS 6.0
RESU7H type C		✓	✓	✓
RESU10H type C		✓	✓	✓
RESU10M		✓	(✓)	(✓)
Battery-Box H	5.1	✓	(✓)	(✓)
	6.4	✓	✓	(✓)
	7.7	✓	✓	✓
	9.0	✓	✓	✓
	10.2	✓	✓	✓
Battery-Box Premium HVM	8.3	✓	(✓)	(✓)
	11.0	✓	✓	(✓)
	13.8	✓	✓	✓
	16.6	✓	✓	✓
	19.3	✓	✓	✓
	22.1	✓	✓	✓
Hyperion era:powerbase AXIstorage Li SH	7.5 (3)	✓	(✓)	(✓)
	10 (4)	✓	✓	✓
	12.5 (5)	✓	✓	✓
	15 (6)	✓	✓	✓

✓ = Yes, (✓) = Limited approval

Background information on the limited approval of some inverter/battery combinations

Example: In the worst-case scenario, the BYD Battery-Box Premium HVM 8.3 can only provide a maximum output power of 3700 W, depending on the SOC. For this application, the SBS3.7 is completely sufficient. Operation with the SBS5.0/6.0 is technically possible, but does not make economic sense due to oversizing.

1.2 SBS3.8-US-10 / SBS5.0-US-10 / SBS6.0-US-10

In the tables you will find the batteries which are approved for operation with the following battery inverters of SMA Solar Technology AG (status: 2020/07):

- SBS3.8-US-10 (Sunny Boy Storage 3.8-US)
- SBS5.0-US-10 (Sunny Boy Storage 5.0-US)
- SBS6.0-US-10 (Sunny Boy Storage 6.0-US)

Type (Manufacturer)	Required battery firmware version for:*	Required inverter firmware version for: **
RESU10H*** / R15563P3SDLT (LG Chem)	≥ 16.13.6 R****	≥ 1.00.20.R
Battery-Box H (5.0)*** (BYD Company Limited)	≥ 3.00.04R	≥ 1.00.20.R
Battery-Box H (7.5)*** (BYD Company Limited)	≥ 3.00.04R	≥ 1.00.20.R
Battery-Box H (10.0)*** (BYD Company Limited)	≥ 3.00.04R	≥ 1.00.20.R

* The firmware version of the battery can be accessed via the user interface of the inverter. The firmware version of the BYD batteries can also be accessed via the user interface of the battery (see manufacturer's manual).

** The firmware version of the inverter can be accessed via the user interface of the inverter.

*** This battery is certified for the operation with the Sunny Boy Storage in SMA Energy Storage systems according to UL 9540. The battery is listed within the SMA Energy Storage systems according to UL 9540.

**** The firmware version of the battery can be updated via the user interface of the inverter.

Synchronizing the battery and battery inverter

All batteries mentioned supply a defined nominal current. Please pay attention to the battery manufacturer's recommendation regarding the suitable dimensioning of the battery in order to achieve the nominal and overload currents of the systems stated in the datasheet with a Sunny Boy Storage. Only if the dimensioning of the battery size is synchronized (battery capacity, battery currents, number of battery modules if necessary), the full functionality and power incl. overload can be guaranteed for the PV storage system with the respective battery inverter in use.

Recommendations for the use in various systems for SBS3.8-US-10 / SBS5.0-US-10 / SBS6.0-US-10:

Type (module configura- tion)	for increased self- consumption	with secure power supply operation	Use in systems		
			Use in battery- backup systems	with multi-battery operation with batteries of the <u>same</u> type	of other types*
RESU10H type C	✓	✓	✓**	✓	✓ Battery-Box H
Battery-Box H (5.0)	✓	✓	✓	✓	✓ RESU10H
Battery-Box H (7.5)	✓	✓	✓	✓	✓ RESU10H
Battery-Box H (10.0)	✓	✓	✓	✓	✓ RESU10H

* Note that the displayed state of charge may jump when using multi-battery operation with batteries of different capacities. It is therefore recommended to select batteries of similar capacity.

** Depending on the state of charge in terms of battery and PV generation, it can happen that the battery-backup grid is interrupted for a few seconds in battery-backup operation mode during load changes and then restarts again. With an additional parameter setting, it will be possible in future to limit the output power of the PV inverter dynamically or to limit to 0 W or to deactivate the PV inverter. This parameter setting is expected to be available after a firmware update in Q2/2019.

✓ = Yes, ✗ = No

2 Battery Communication Connection

2.1 Cable Requirements

2.1.1 SBS2.5-1VL-10

- Twisted pair conductors
- Cable category: minimum CAT5e
- Shielding: yes
- Conductor cross-section: 0.25 mm² to 0.34 mm² (24 AWG to 16 AWG)
- Recommended number of conductor pairs: 4
- Maximum cable length: 10 m (33 ft)
- The cable has to be insulated for 600 V.
- UV-resistant for outdoor use. SMA Solar Technology AG recommends the cable "UC900 SS23 Cat.7 PE"

- Comply with the requirements of the battery manufacturer.

2.1.2 SBS3.7-10 / SBS5.0-10 / SBS6.0-10

- Twisted pair conductors
- Cable category: minimum CAT5e
- Shielding: yes
- Conductor cross-section: 0.25 mm² to 0.34 mm² (24 AWG to 16 AWG)
- External diameter: 6 mm to 8.5 mm (0.24 in to 0.33 in)
- Recommended number of conductor pairs: 4
- Maximum cable length between battery and inverter and, in battery-backup systems, between automatic transfer switch and inverter: 10 m (33 ft)
- The cable has to be insulated for 600 V.
- UV-resistant for outdoor use.
- Comply with the requirements of the battery manufacturer.

2.1.3 SBS3.8-US-10 / SBS5.0-US-10 / SBS6.0-US-10

- Twisted pair conductors
- Cable category: minimum CAT5e
- Shielding: yes
- Conductor cross-section: 0.25 mm² to 0.34 mm² (24 AWG to 16 AWG)
- External diameter: 6 mm to 8.5 mm (0.24 in to 0.33 in)
- Recommended number of conductor pairs: 4
- Maximum cable length between battery and inverter and, in battery-backup systems, between automatic transfer switch and inverter: 10 m (33 ft)
- If the cables are routed together with the DC conductors in a conduit, each cable has to be insulated for 600 V.
- UV-resistant for outdoor use.
- Comply with the requirements of the battery manufacturer.

2.2 Cabling Plan

2.2.1 SBS2.5-1VL-10

Sunny Boy Storage with LG Chem RESU7H / RESU10H

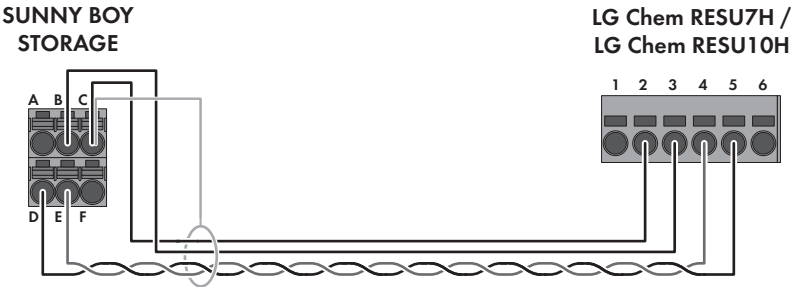


Figure 1: Cabling plan SBS2.5-1VL-10 with RESU7H / RESU10H

Clamping position	Assignment	Clamping position	Assignment
A	Not assigned	-	-
B	Enable	3	BAT EN
C	GND and shielding	2	GND - AUX
D	CAN L (twisted pair conductors, at least CAT5e)	5	CAN - L
E	CAN L (twisted pair conductors, at least CAT5e)	4	CAN - H
F	Not assigned	-	-

Sunny Boy Storage (SBS2.5-1VL-10) with BYD Battery-Box H



Figure 2: Cabling plan SBS2.5-1VL-10 with Battery-Box H

Clamping position	Assignment	Clamping position	Assignment
A	Not assigned	–	–
B	Enable	2	EN 11 V +
C	GND and shielding	4	EN 11 V-
D	CAN L (twisted pair conductors, at least CAT5e)	8	CANL
E	CAN L (twisted pair conductors, at least CAT5e)	6	CANH
F	Not assigned	–	–

2.2.2 SBS3.7-10 / SBS5.0-10 / SBS6.0-10 / SBS3.8-US-10 / SBS5.0-US-10 / SBS6.0-US-10

Sunny Boy Storage with LG Chem RESU7H / RESU10H

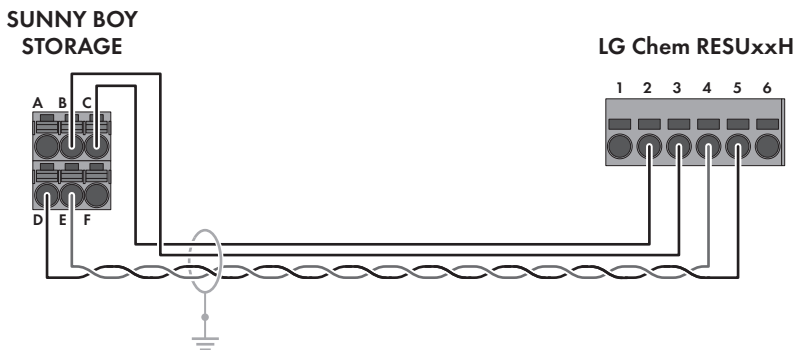


Figure 3: Cabling plan SBS3.7-10 / SBS5.0-10 / SBS6.0-10 / SBS3.8-US-10 / SBS5.0-US-10 / SBS6.0-US-10 with RESU7H / RESU10H

Clamping position	Assignment	Clamping position	Assignment
A	Not assigned	–	–
B	Enable	3	BAT EN
C	GND	2	GND - AUX
D	CAN L (twisted pair conductors, at least CAT5e)	5	CAN - L
E	CAN L (twisted pair conductors, at least CAT5e)	4	CAN - H
F	+12V supply for automatic transfer switching device	–	–

Sunny Boy Storage 3.7 with LG Chem RESU10M

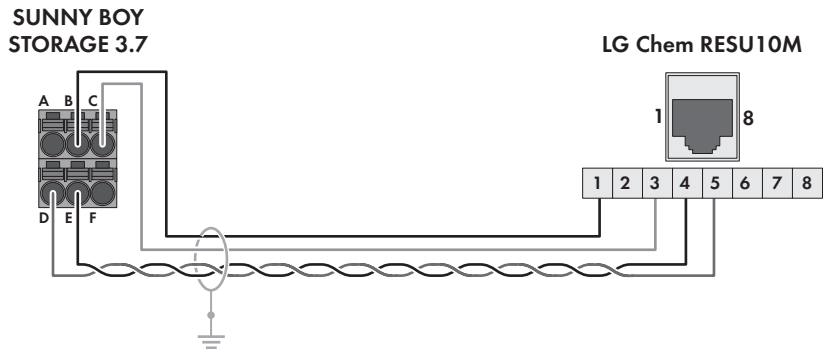


Figure 4: Cabling plan SBS3.7-10 with RESU10M

Clamping position	Assignment	Pin	Assignment
A	Not assigned	-	-
B	Enable	1	Enable
C	GND	3	GND
D	CAN L (twisted pair conductors, at least CAT5e)	5	CAN L
E	CAN L (twisted pair conductors, at least CAT5e)	4	CAN H
F	+12V supply for automatic transfer switching device	-	-

Sunny Boy Storage with BYD Battery-Box H

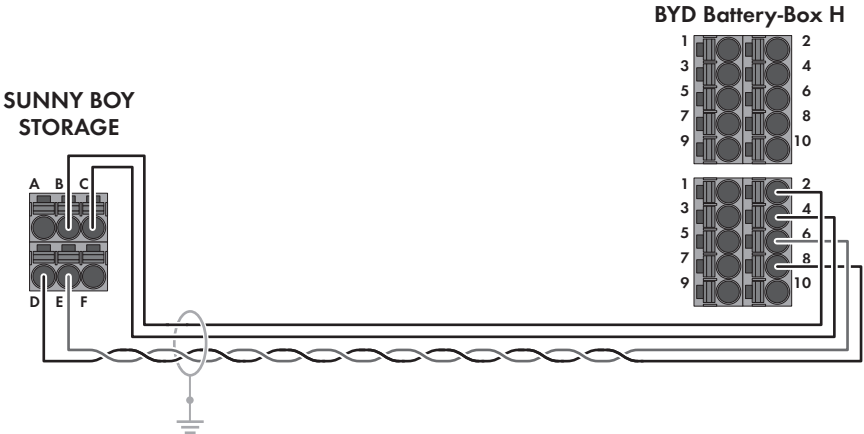


Figure 5: Cabling plan SBS3.7-10 / SBS5.0-10 / SBS6.0-10 / SBS3.8-US-10 / SBS5.0-US-10 / SBS6.0-US-10 with Battery-Box H

Clamping position	Assignment	Clamping position	Assignment
A	Not assigned	-	-
B	Enable	2	EN 11 V +
C	GND	4	EN 11 V -
D	CAN L (twisted pair conductors, at least CAT5e)	8	CANL
E	CAN L (twisted pair conductors, at least CAT5e)	6	CANH
F	+12V supply for automatic transfer switching device	-	-

Sunny Boy Storage with BYD Battery-Box Premium HVM

When using the BYD Battery-Box Premium HVM with the Sunny Boy Storage 3.7/ 5.0/ 6.0, note the "Information on Commissioning" in the download area of our homepage under <http://www.SMA-Solar.com>.

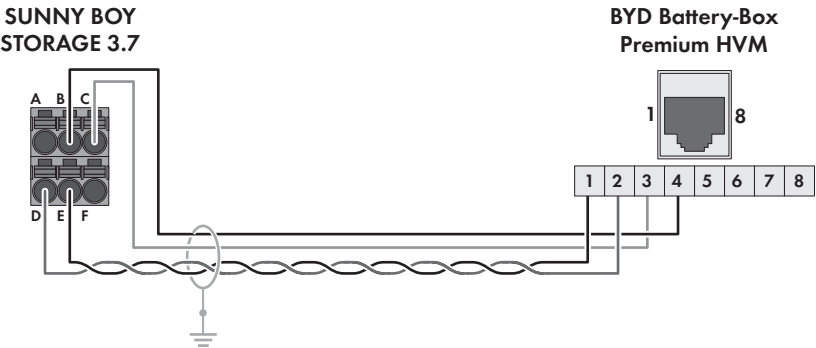


Figure 6: Cabling plan SBS3.7-10 / SBS5.0-10 / SBS6.0-10 / SBS3.8-US-10 / SBS5.0-US-10 / SBS6.0-US-10 with Battery-Box Premium HVM

Clamping position	Assignment	Pin
A	Not assigned	-
B	Enable	4
C	GND	3
D	CAN L (twisted pair conductors, at least CAT5e)	2
E	CAN L (twisted pair conductors, at least CAT5e)	1
F	+12V supply for automatic transfer switching device	-

Sunny Boy Storage with BMZ Hyperion, IBC SOLAR era:powerbase and Axitec AXIstorage Li SH

SUNNY BOY STORAGE

BMZ-Hyperion / IBC era:powerbase / Axitec AXIstorage LI SH

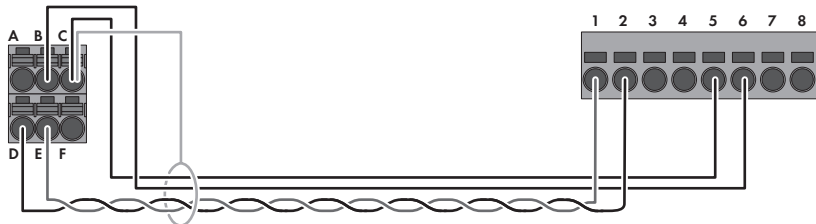


Figure 7: Cabling plan SBSxx-10 with BMZ Hyperion, IBC era:powerbase and Axitec AXIstorage Li SH

Clamping position	Assignment	Pin
A	Not assigned	-
B	Enable	6 (red)
C	GND	5 (black)
D	CAN L (twisted pair conductors, at least CAT5e)	2 (white)
E	CAN L (twisted pair conductors, at least CAT5e)	1 (yellow)
F	+12V supply for automatic transfer switching device	-

2.3 Information about the electrical connection

Connection of batteries with a charging/discharging current limit of 20 A

This connection is recommended for the following batteries:

- LG RESU7H
- LG RESU10H

Procedure:

The DC terminals A and B must be switched parallelly using the jumpers provided.

The battery must be connected to the terminal blocks **A+** and **A-**.

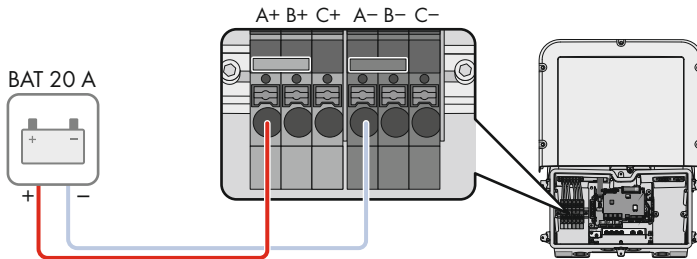


Figure 8: Overview for connection of a battery with a charging/discharging current limit of 20 A

Connection of a battery with a charging/discharging current limit of 30 A

This connection is recommended for the following batteries:

- LG RESU 10M
- BYD Battery-Box H 5.1-10.2
- BYD Battery-Box HVM 8.3-22.1
- BMZ Hyperion
- IBC SOLAR era:powerbase
- Axitec AXIstorage Li SH

Procedure:

All DC terminals must be switched parallelly with the jumpers provided.

The battery must be connected to the terminal blocks **A+** and **A-**.

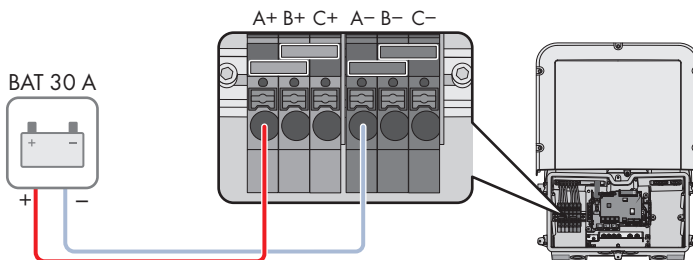


Figure 9: Overview for connection of one battery with a charging/discharging current limit of 30 A.

ENERGY
THAT
CHANGES

